


POWER QUALITY MONITORING

TRUSTWORTHY
POWER MONITORING

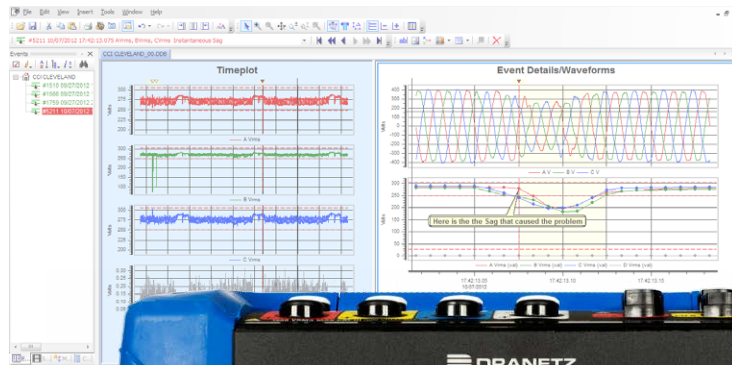


DRANETZ HDPQ® PLUS SERIES

HDPQ PLUS SERIES

VISA PLUS • GUIDE PLUS • XPLOER PLUS • XPLOER 400 PLUS



Portable Geräte für umfangreiche
Netzqualitäts-, Leistungs- und
Energiesmessungen im
Anwendungsbereich von
1000 V CAT III, 600 V CAT IV

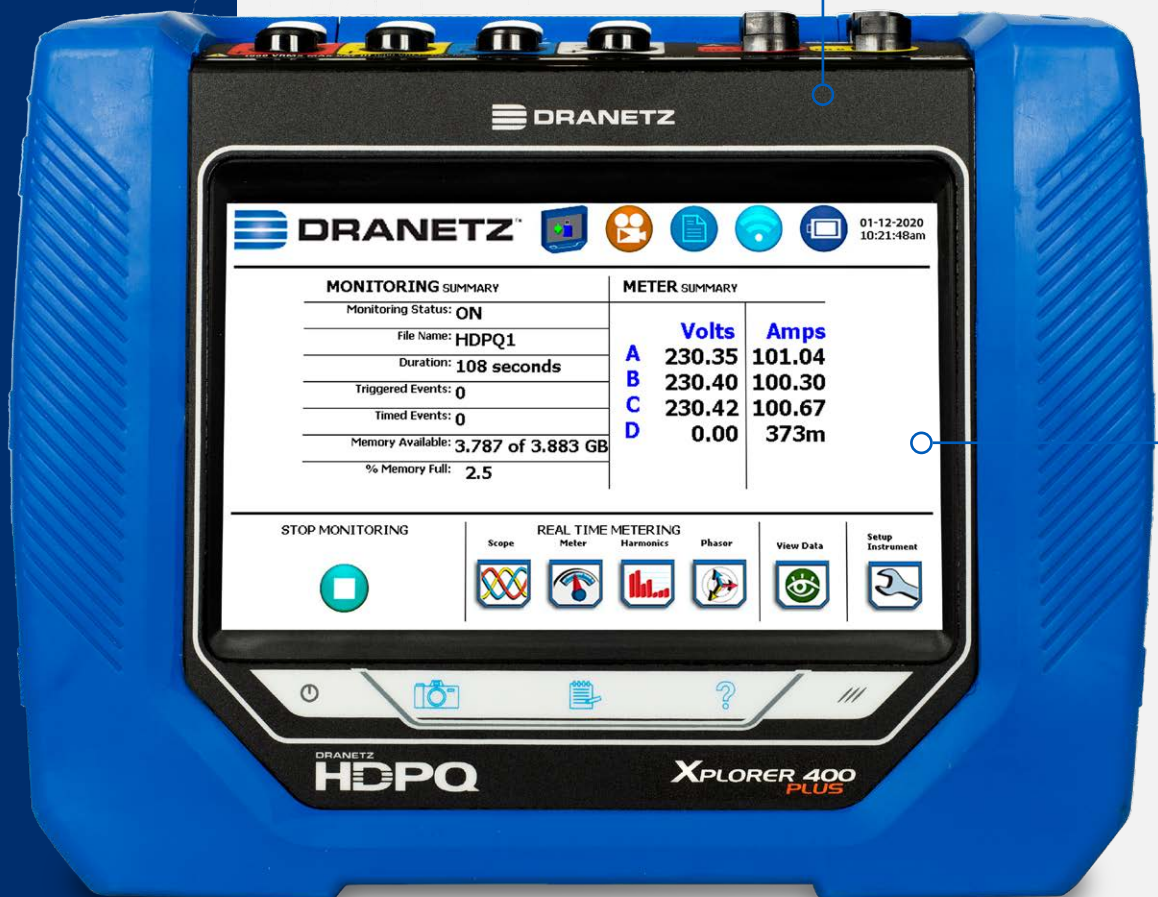

DRANETZ HDPQ® FAMILY

- 4 MODELS TO MEET EVERY BUDGET AND APPLICATION

DRANETZ HDPQ® PLUS SERIES
PORTABLE, 7" DISPLAY



XPLORER 400 PLUS

XPLORER PLUS


VISA PLUS

GUIDE PLUS


APPLICATIONS (model dependant)

- PQ Surveys
- Energy/Load Surveys & Studies
- Data Logging
- Substation Monitoring
- DER/Alternative Energy
- Capacitor Testing
- Motor Testing
- Advanced Load Distortion and Imbalance
- Fault Recording/In-Rush
- UPS, Generator Testing/Commissioning
- Transformer/Inrush Testing
- TVSS, Protection Device Testing
- Aircraft/Aviation, Naval

50 YEARS OF TRUSTWORTHY MEASUREMENT

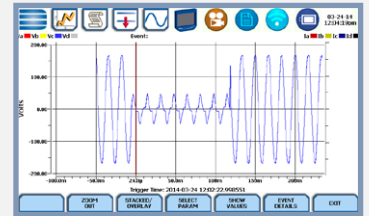


PQ Surveys
IEC 61000-4-30 Class A Ed 3

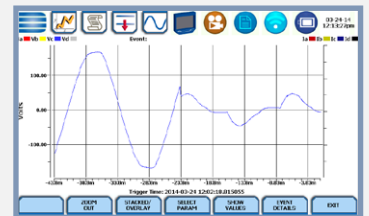


Transient Recording
Peak, Waveshape Changes



Harmonics Recording
IEEE 519-2014, IEC 61000-4-7

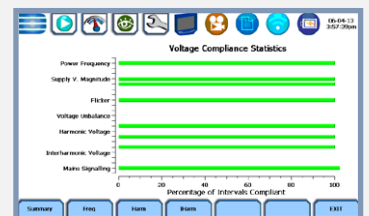

Compliance Reporting
IEEE 519-2014, EN 50160

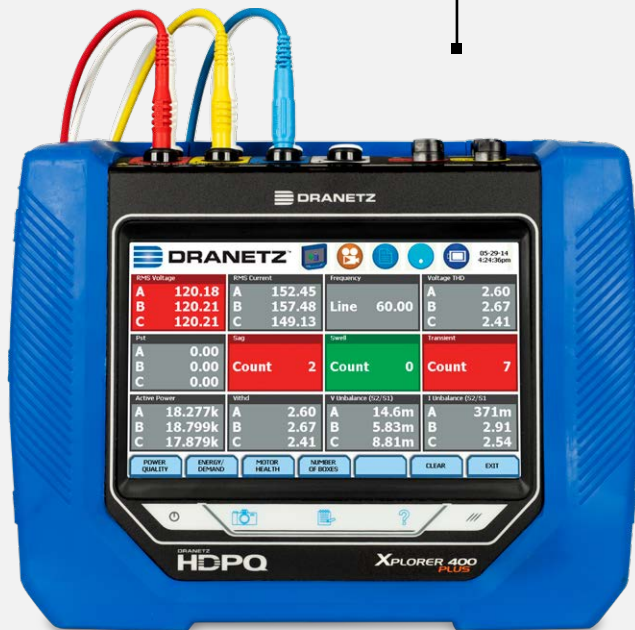

V & I CONNECTIONS

- 1000V CAT III (600V CAT IV)
- AC/DC Differential Voltage & Current Inputs
- DRANFLEX CT's powered by the instrument
- IEC 61000-4-30 Class A Ed. 3 Compliant



DRANETZ HDPQ® PLUS SERIES

Portable with 7" Display + Colored Cables



SAFE REMOTE ACCESSIBILITY VIA DRAN-VIEW® 7, APPS AND VNC

- Set it and forget it! Hands off for safety.
- Full remote access using ethernet. Wi-Fi (model dependent) and optional Bluetooth *
- Remote control, data analysis & reporting using Dran-View® 7
- Remote control using Android and Apple VNC Apps.




* **Note:** The WiFi and Bluetooth functions are not available in Europe!



DRAN-VIEW 7 REMOTE CONTROL, ANALYSIS & REPORTING

- Windows based power quality, demand & energy analysis
- Powerful, yet easy to use
- 64 bit software for speed
- Fully compatible with the Dranetz HDPQ series and most legacy products
- Two versions are available
 - **PRO** for the everyday user (Free)
 - **ENTERPRISE** for the advanced user (included with Guide, Xplorer, and Xplorer 400)
- Automatic (or manual) internet updates

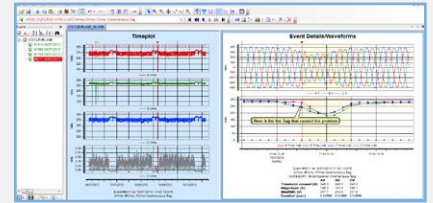


REAL TIME REMOTE CONTROL OF ALL HDPQ SERIES INSTRUMENTS

- Remotely control the user interface – as if you were in front of the meter
- Remote real time metering
- Remote control of all settings
- Remotely download recorded data



POWERFUL ANALYTICAL TOOLS

- View all recorded instrument data
- Trends, events, waveforms
- Zooming, panning, scrolling and other tools
- Event filtering & sorting
- Rescue kit – correct timestamps, scaling, connections

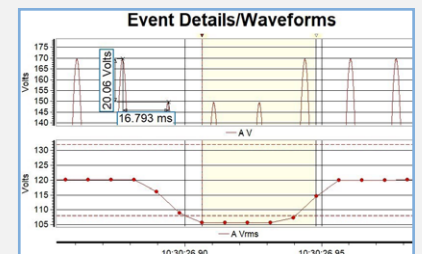


REPORTING

- Automatic or manual report generation
- Customizable report contents with YOUR logo
- Compliance reporting – IEEE 519-2014, EN 50160 and more
- Integrated RTF editor

Event Details/Waveforms									
Date:	3/14/2020	Interval:	Daily	Statistic:	Vary Short (99th)	Compliance:	Fail		
Nominal voltage:	250.00	Nominal current:	10.33	Max Demand Current:	100.00	Max Short-Cir Current:	100.00		
Item	AV	AI	BV	BI	CV	CI	DV	DI	
THD	39.403		39.399		39.404				
TDD		0.023		0.033		0.030			
2	0.008	0.007	0.010	0.008	0.011	0.007			
3	18.082	0.007	18.080	0.008	18.084	0.008			
4	0.008	0.008	0.008	0.005	0.009	0.005			
5	18.088	0.008	18.088	0.005	18.080	0.008			
6	0.008	0.005	0.007	0.005	0.008	0.005			
7	18.088	0.008	18.088	0.005	18.088	0.008			
8	0.008	0.005	0.007	0.005	0.008	0.005			
9	18.088	0.008	18.087	0.005	18.085	0.008			
10	0.009	0.005	0.010	0.005	0.010	0.008			
11	0.007	0.008	0.008	0.008	0.009	0.008			
12	0.007	0.008	0.008	0.005	0.008	0.008			
13	0.007	0.008	0.009	0.005	0.010	0.008			
14	0.007	0.008	0.008	0.008	0.009	0.008			
15	0.007	0.008	0.007	0.005	0.010	0.008			

DRAN-VIEW® 7 ENTERPRISE ALSO INCLUDES

- Snapshot/Bookmark tool
- Drag & drop charts – customizable appearance
- Insert pictures & photos into charts
- Annotations – add comments to points in charts
- Multisite capabilities – overlay data from different sites
- Math tool – create formulas for custom parameters
- Harmonic generation tool – compute harmonics from any recorded waveforms

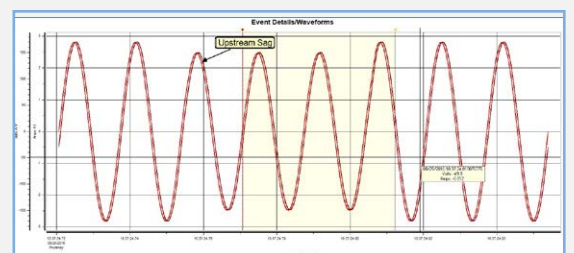



DRANETZ HDPQ FAMILY MODEL SELECTOR

	Visa Plus	Guide Plus	Xplorer Plus	Xplorer 400
Plus				
ENCLOSURE				
Portable with 7" Touch Screen	☐	☐	☐	☐
POWER SUPPLY				
AC Mains Power - 90-264, 50/60Hz	☐	☐	☐	☐
MEASUREMENTS & MONITORING				
Power Quality - Sag, Swell, Interruption	☐	☐	☐	☐
IEC61000-4-30 Class A Ed. 3 Compliant	☐	☐	☐	☐
W, VA, VAR, PF, Demand Energy	☐	☐	☐	☐
Peak & Waveshape Transient Capture	☐	☐	☐	☐
Harmonics - IEC61000-4-7, IEEE519-2014	☐	☐	☐	☐
Flicker - IEC61000-4-15, IEEE1453	☐	☐	☐	☐
Pre/Fault/Post Cycles	100	10,000	10,000	10,000
Pre-Programmed Monitoring Modes	7	9	9	9
AnswerModules - Motor Health, Sag, PF Cap		☐	☐	☐
High Speed Transient Capture			☐	☐
400 HZ Measurements				☐
COMMUNICATIONS				
Ethernet	☐	☐	☐	☐
Wi-Fi *		☐	☐	☐
USB	☐	☐	☐	☐
Dran-View 7 Full Remote Control & Data Downloading	☐	☐	☐	☐
Apple & Android VNC Apps - Full Remote Control	☐	☐	☐	☐
GPS Time Synch (optional)	☐	☐	☐	☐
APPLICATIONS				
PQ Surveys	☐	☐	☐	☐
Energy/Load Surveys & Studies	☐	☐	☐	☐
Data Logging	☐	☐	☐	☐
Substation Monitoring	☐	☐	☐	☐
DER/Alternative Energy	☐	☐	☐	☐
Capacitor Testing	☐	☐	☐	☐
Motor Testing		☐	☐	☐
Advanced Load Distortion and Imbalance		☐	☐	☐
Fault Recording / In-Rush		☐	☐	☐
UPS, Generator Testing/Commissioning		☐	☐	☐
Transformer/Inrush testing		☐	☐	☐
TVSS, Protection Device Testing			☐	☐
Aircraft/Aviation, Naval				☐

* Note: The WiFi and Bluetooth functions are not available in Europe!



TECHNICAL DATA

MEASURED PARAMETERS

- (4) Differential Voltage: 512 s/c, 16 bit resolution
0-1000Vrms, AC/DC, $\pm 0.1\%$ reading, $<40V \pm 0.5\%$ FS
IEC 61000-4-30 Class A: 60-1000Vrms, $\pm 0.1\%$ of U_{din} , range of 10%-150% of U_{din}
Transients: 0-1414Vpk, $\pm 0.2\%$ of U_{din}
Transients - High Speed: 1MHz (Xplorer/400), 10-2000 Vpk, $\pm 10\%$ of reading, $\pm 0.5\%$ FS
- (4) Current: 512 s/c, 16 bit resolution
Range probe dep., AC/DC, $\pm 0.1\%$ reading $\pm 0.05\%$ FS

FREQUENCY:

16-25Hz, 42.5-69Hz, ± 0.01 Hz

CALCULATED PARAMETERS

POWER/ENERGY - 1 SECOND SAMPLING

Real Power (W) - P: meets 0.2S requirements, range probe dep.
Apparent Power (VA) - S: meets 0.2S requirements, range probe dep.
Reactive Power (var) - Q: meets 0.2S requirements, range probe dep.
Power Factor (W/VA) - "true" -1 to 0 to +1
Displacement PF -1 to 0 to +1
Demand (in W): meets 0.2S requirements, range probe dep.
Energy (in Wh): meets 0.2S requirements, range probe dep.

DISTORTION - 200MS, 3 SEC, 10 MIN WINDOWS

Vthd: 0-100%, $\pm 5\%$ for $V \geq 10\% V_{nom}$,
V Ind Harm: DC, 2-127, $\pm 5\%$ for $V \geq 10\% V_{nom}$
Ithd: 0-100%, $\pm 5\%$ for $I \geq 10\% I_{nom}$,
I Ind Harm: DC, 2-63, $\pm 5\%$ for $I \geq 10\% I_{nom}$

MISC.

Pst - 10 minutes: 0.2-10, ± 0.05 @ Pst=1
Plt - 2 hours: 0.2-10, ± 0.05 @ Pst=1

EASE OF USE FEATURES

Automatic Setups
Pre-programmed monitoring modes
Dashboards - PQ, Demand & Energy
Simultaneous PQ, Demand & Energy Monitoring
Mini Report

STANDARDS COMPLIANCE

POWER QUALITY

IEC 61000-4-30 Class A Edition 3 Compliant
IEEE 1159: 2009

POWER

IEEE 1459: 2000

HARMONICS

IEC 61000-4-7 Class 1: Edition 2 (2008)
IEEE 519: 2014

VOLTAGE FLICKER

IEC 61000-4-15: Edition 2 (2010)
IEEE 1453: 2011

COMPLIANCE/TESTING

EN 50160: 2010

GENERAL SPECIFICATIONS

DRANETZ HDPQ PLUS SERIES

Size: (10" w x 8" h x 2.75" d), (25.4cm x 20.3cm x 7.00cm)
Weight: 4.2lbs, 2kg
Operating temperature: 0 to 50 deg C (32 to 122 deg F)
Storage temperature: -20 to 55 deg C (-4 to 131 deg F)
Humidity: 10-90% non condensing
Run time on full charge: 3 hrs Visa/Guide, 2.5hrs Xplorer/400, 3 hours charge time
AC Power: 90-264(max) 50/60Hz
Display: 7" WVGA color graphic, Icon based touch LCD, LED Backlit
Clock accuracy and resolution
Internal: ± 1 sec/day at 25deg C
NTP: ± 10 msec
GPS: ± 1 msec
Memory size: 4GB
Languages: English, German, Spanish, French, Italian, Swedish, Finnish, Polish, Chinese (traditional and simplified), Thai, Korean

COMMUNICATIONS

Ethernet, 802.11 b/g/n Wi-Fi (not available in Visa Plus) *
USB
Bluetooth via USB adapter (optional) *
VNC remote control
Android® & Apple® VNC App

* **Note:** The WiFi and Bluetooth functions are not available in Europe!

COMMON ACCESSORIES



FLEX CT'S




CLAMP CT'S



ENCLOSURES



MAGNETIC MOUNT



BOOKS





All trademarks, registered trademarks, logos, product names, and company names are the property of their respective owners.

Camille Bauer Metrawatt AG
Aargauerstrasse 7 ■ 5610 Wohlen ■ Switzerland
TEL +41 56 618 21 11

www.camillebauer.com ■ sales@camillebauer.com